
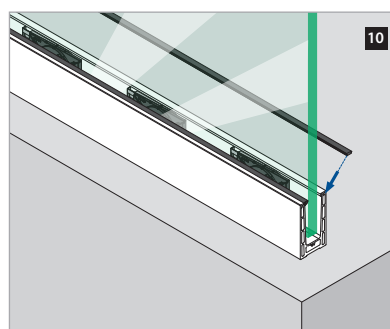
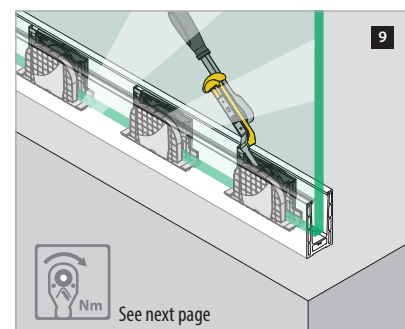
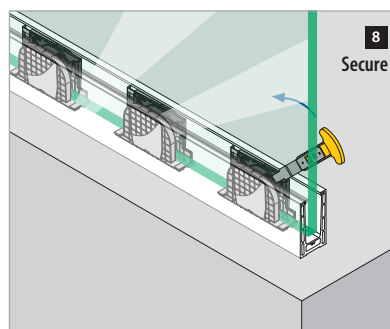
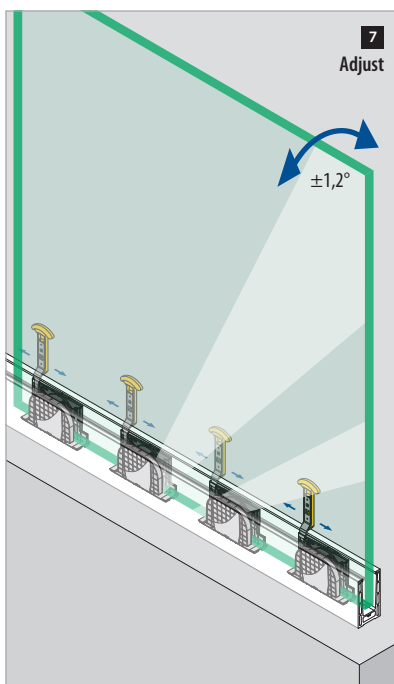
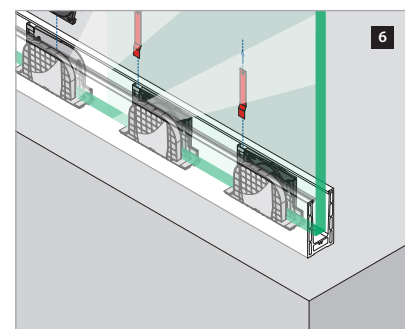
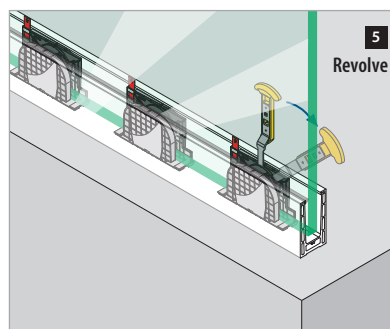
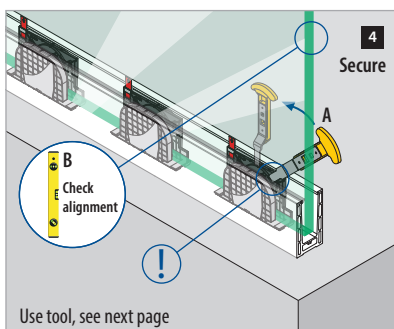
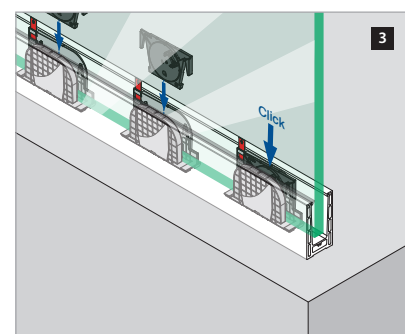
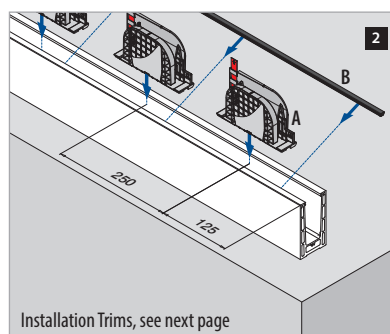
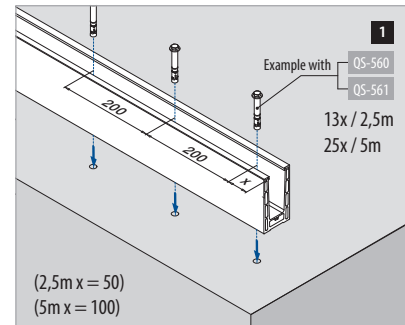
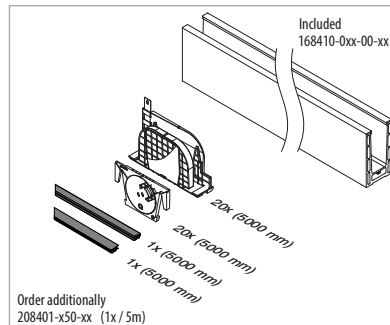


Railing base





EASY GLASS® PRIME TOP - Base shoe, top mount

For adjustable glass fixation


Q-INFO

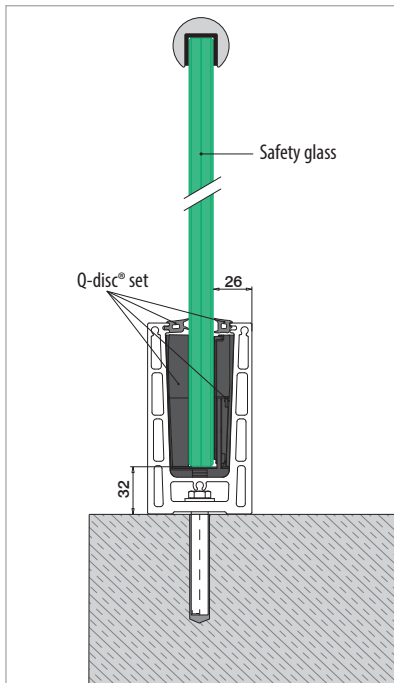

Q-INFO

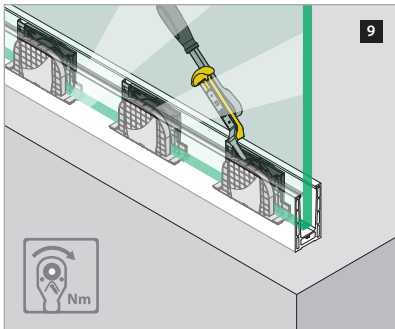

T_{inst} (disk): 35Nm

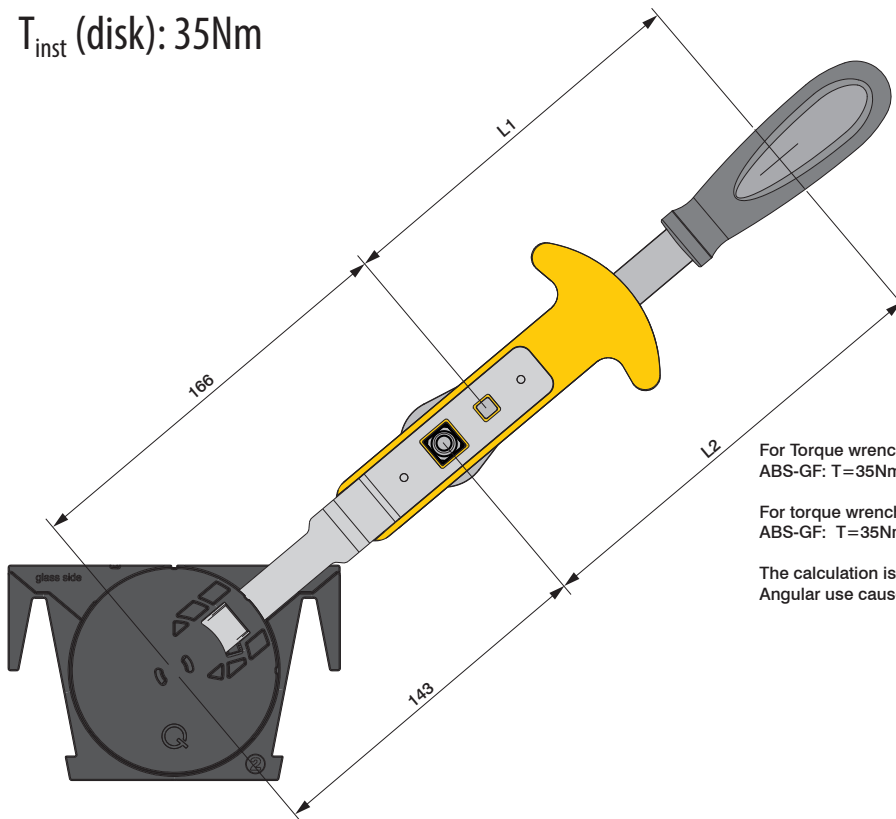

For Torque wrench 1/4":
ABS-GF: $T = 35\text{Nm} \cdot L1 / (L1 + 166\text{mm})$

For torque wrench 1/2":
ABS-GF: $T = 35\text{Nm} \cdot L2 / (L2 + 143\text{mm})$

The calculation is valid for straight-lined use.
Angular use causes different torque.